


# HARDY SHAKER QUICKSTART GUIDE HI-913

## 1. Mount Vibration Sensor



Secure Mounting Platform  
with Supplied Flat Wrench

## OR Mount Proximity Probe

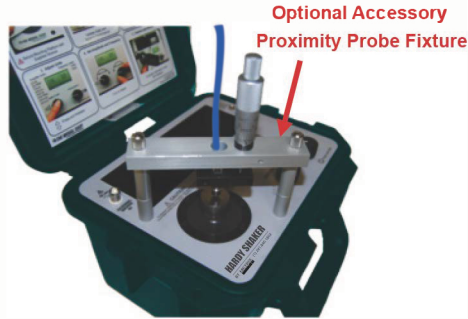

Validate Static and  
Dynamic Performance

## 2. Power On/Off




Press and Hold **FREQUENCY**

## 3. Select Units



Press and Release **AMPLITUDE**  
to Select Units of Readout

## 4. Set Amplitude and Frequency

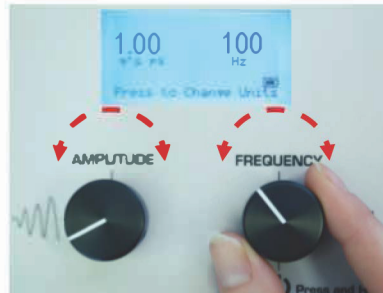

Turn to Adjust **AMPLITUDE**  
and **FREQUENCY**

## 5. Observe and Record



Compare Calibration Level  
with Readout